

ASSISTANCE SERVICES PISCINE

Filter shell made of FR Polyester and reinforced by fiberglass bobbin winding outside. Complete with pressure gauge, air release 1/2". Test pressure 4kg/cm². Max. operation pressure 2,5 kg/cm². Filtration rate: 40 m³/h/m². Filtration bed depth: 1,0m (Excluding 021717E). Please ask price for 4,0 and 6,0 kg/cm² operation pressures.




Fiberglass Reinforced Filter Lid



40 cm Large Lid Opening




Double Flange Connections with Screws



Filter Drainage

MODEL	1200E	1200	1400	1600	1800	2000	2200	2400	2500
D (mm)	1200	1200	1400	1600	1800	2000	2200	2400	2500
H ₁ (mm)	1160	1566	1800	1905	1950	2050	2300	2370	2770
H ₃ (mm)	1100	1506	1794	1845	1890	1990	2240	2310	2710
H ₄ (mm)	490	617	650	710	750	810	900	900	950
H ₅ (mm)	820	947	980	1210	1260	1300	1400	1400	1450
CONNECTIONS Ø (mm)	90	90	110	125	140	160	200	200	200
FLOW (m ³ /h) (50 m ³ /h/m ²)	56	56	77	100	127	157	190	226	245
SAND (Kg)	1300	1500	1950	2750	3650	4750	5700	6600	10000
NET WEIGHT (Kg)	80,000	159,000	180,000	240,000	290,000	330,000	480,000	575,000	650,000

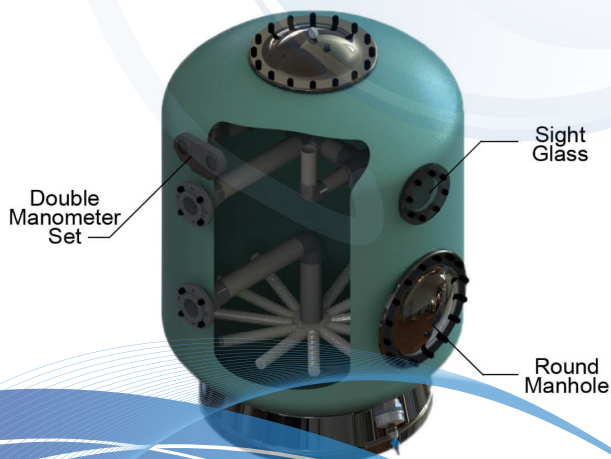

Additional Options

Round Manhole (2,5 bar) Ø 400 mm

Round Manhole (4 bar) Ø 400 mm

Sight Glass Ø 90 mm

Sight Glass Ø 125 mm

Sight Glass Ø 200 mm

Automatic Air Purge 1"

Automatic Air Purge 2"

Double Manometer Set

Double Manometer Set with Sampling Valves

Ozone Protection (Vinylester coating)

Sand Bed Depth = 1,5 m difference (from 1,2 m)

Nozzle Plate

Agence Nouvelle Aquitaine

8 rue des forts
17430 Saint Hippolyte
asp.infos@free.fr - 07.68.64.71.32

Agence Bretagne

4 rue des Charrons
56450 Theix
asp.bretagne@free.fr - 07.68.13.74.52